

MCV, MCVS

Vertical multistage pump



System characteristics

The MCV(S) family, a range of vertical high pressure multistage pumps, has a high interchangeability in parts to other pumps from Johnson Pump, like MCH and MCHZ.

There are seven different sizes, each built up with one or more stages.

Applications

The MCV(S) pump family is suitable for handling clean or slightly contaminated liquids for instance well water, hot water, various coolants, condensed water, brine lye, sea water, petrol, kerosene, and petroleum.

For e.g. booster installations, hot water circulating systems, airconditioning systems, cooling for stationery and marine installations, industry, waterworks, agriculture and horticulture, spraying installations and ship-building. As a general service and transport pump for feed installations in the industry, industries in general, road building and hydraulic engineering.

Pump specifics

- Suitable for a wide span of duties
- Rubber coupling guarantees a noiseless pump and also a long life
- Large hydraulic field of application
- Also available in horizontal position
- Suitable for various liquids
- High interchangeability in spare parts between different sizes, thus limiting spare parts stock levels

Technical data



Type MCV:	Stuffing box packing Temperature -15°C – +105°C
Type MCVS:	Mechanical seal Temperature -20°C – +120°C
Maximum capacity:	100 m ³ /h
Maximum delivery head:	340 m
Maximum operating pressure:	40 - 3 x inlet pressure bar (4000 - 3 x inlet pressure kPa) <i>depending on pump size/materials</i>

Materials


Casing parts	Cast iron	
Impeller	Cast iron	Bronze
Pump shaft	Steel alloy	
Lantern piece	Cast iron	



Performance data

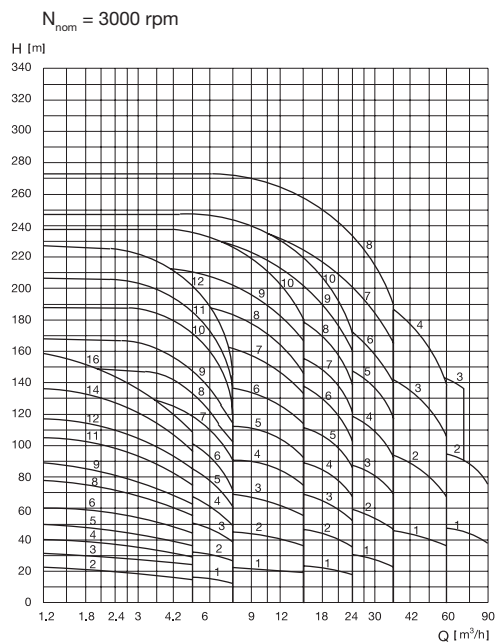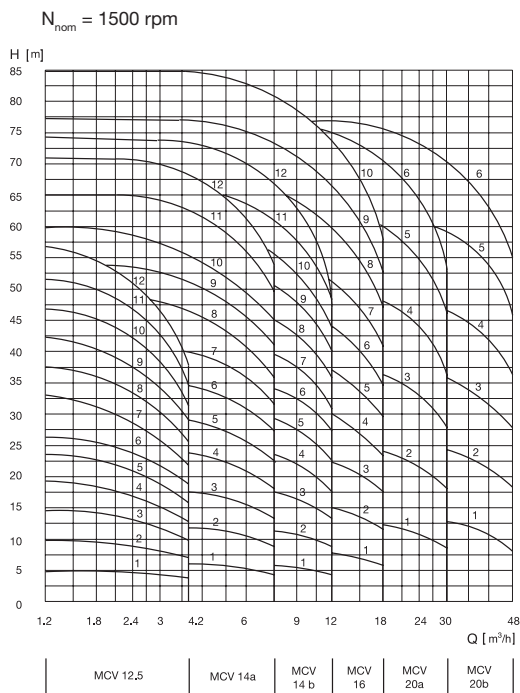

Dimensions

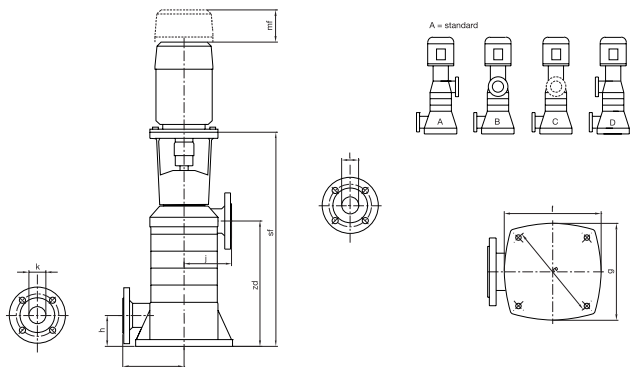

	10 x n - 2,5	12,5 x n - 3,2	14a/b x n - 5	16 x n - 6,5	20 a/b x n - 8
e	195	280	310	350	450
f	174	250	285	315	400
g	174	250	285	315	400
h	-	75	90	114	114
j	65	125	140	160	225
k	-	32	50	65	80
l	-	32	50	65	80

mf : depending on motor frame size

MCV - MCVS	sf	zd
10 x 2	425	180
10 x 3	425	180
10 x 4	448	203
10 x 4	448	203
10 x 5	471	226
10 x 5	471	226
10 x 5	471	226
10 x 6	494	249
10 x 6	494	249
10 x 8	563	318
10 x 8	573	318
10 x 9	563	318
10 x 9	573	318
10 x 11	666	411
10 X 11	666	411
10 X 12	666	411
10 X 12	666	411
10 X 14	712	457
10 X 16	759	504

MCV - MCVS	sf	zd
12,5 x 1	440-460	199
12,5 x 2	485-505	244
12,5 x 3	530-550-560	289
12,5 x 4	575-595-605	334
12,5 x 5	620-640-650-670	379
12,5 x 6	665-685-695-715	424
12,5 x 7	730-740-760	459
12,5 x 8	775-835	514
12,5 x 9	820-850-880	559
12,5 x 10	865-895-925	604
12,5 x 11	910-940	649
12,5 x 12	955-985-1115	694
14a x 1	460-480	219
14a x 2	510-530-540	269
14a x 3	580-590-610	319
14a x 4	630-660-690	369
14a x 5	680-710-740	419
14a x 6	730-760-790	469
14a x 7	780-790-840	519

MCV - MCVS		sf	zd
14a x 8		830-840-890	569
14a x 9		880-890-940	619
14a x 10		930-940-990	669
14a x 11		990	719
14a x 12		1040	769
14b x 1		460-480-490	219
14b x 2		530-540-560	269
14b x 3		580-610-640	319
14b x 4		630-640-660-690	369
14b x 5		680-690-740	419
14b x 6		730-740-790	469
14b x 7		780-790-840	519
14b x 8		840-890	569
14b x 9		890-940	619
14b x 10		940-990	669
14b x 11		990	719
14b x 12		1040-1060	769
16 x 1		584-594-614	271
16 x 2		644-674-704	331

MCV - MCVS		sf	zd
16 x 3	704-714-764		391
16 x 4	764-774-824		451
16 x 5	834-884		511
16 x 6	894-914-944		571
16 x 7	954-974-1004		631
16 x 8	1014-1034-1064		691
16 x 9	1074-1094		751
16 x 10	1134-1154		811
20a x 1	638-648-668-698		319
20a x 2	723-773		394
20a x 3	798-818-848		469
20a x 4	873-893-923		544
20a x 5	968-998		619
20a x 6	1043-1073		694
20b x 1	638-648-698		319
20b x 2	723-743-773		394
20b x 3	818-848		469
20b x 4	893-923		544
20b x 5	968-998		619
20b x 6	1073		694



Johnson Pump B.V.



Dr. A.F. Philipsweg 51. P.O. Box 372, NL-9400 AJ Assen. Tel +31 592 37 67 00. Fax +31 592 37 67 10

Axiom Technologies-Kolkata

Ph:+91 33 32951385

admin@axiomtech.co.in